

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORLED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

A61M 25/00

A1

(11) International Publication Number:

WO 99/64098

(43) International Publication Date: 16 December 1999 (16.12.99)

(21) International Application Number: PCT/US99/13328

(22) International Filing Date: 11 June 1999 (11.06.99)

(30) Priority Data:

09/096,267

11 June 1998 (11.06.98)

US

(71) Applicant: SCIMED LIFE SYSTEMS, INC. [US/US]; One Scimed Place, Maple Grove, MN 55311-1566 (US).

(72) Inventors: JANSEN, Lex, P.; 2237 Via Espada, Pleasanton, CA 94566 (US). CHIEN, Thomas, Yung-Hui; 2653 Ramsdell Place, San Jose, CA 95148 (US). FUKUI, Perry, Alvin; 4220 Patricia Street, Fremont, CA 94536 (US). SARGE, Jeffrey, A.; 647 Lonsdale Avenue, Fremont, CA 94539 (US). ALPERT, Lawrence, Charles; 39661 Royal Palm Drive, Fremont, CA 94538 (US).


(74) Agents: WHEELOCK, E., Thomas et al.; Morrison & Foerster LLP, 755 Page Mill Road, Palo Alto, CA 94304-1018 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: CATHETER WITH COMPOSITE STIFFENER

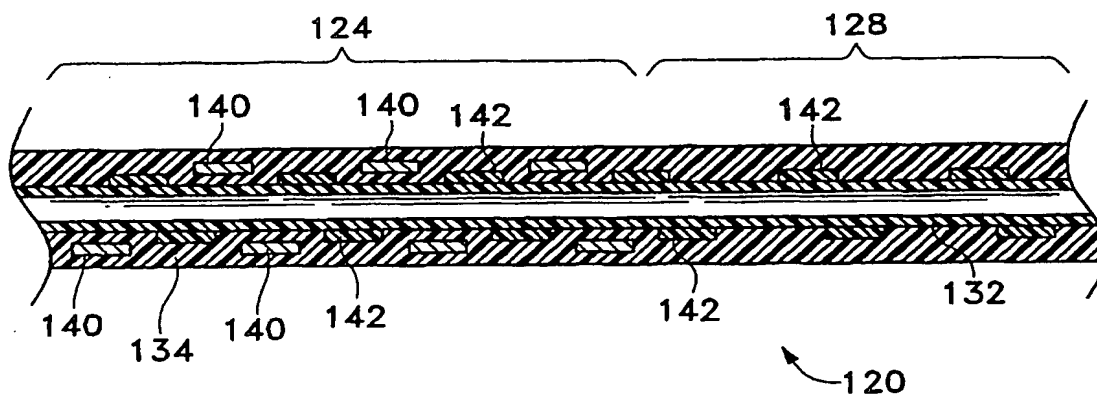

(57) Abstract

A catheter comprising an elongate tubular member having a proximal end, a distal end, and a passageway defining a lumen extending between the proximal and distal ends. The elongate tubular member comprises a relatively stiff proximal section and a relatively flexible distal section. The proximal section includes an inner tubular liner, a first stiffener comprising a metal alloy, and a second stiffener comprising a non-metal alloy. The first and second stiffeners are coaxially wound exterior to the proximal inner liner. The distal section includes a distal inner tubular liner and the second stiffener coaxially wound exterior to the distal inner liner. The first stiffener terminates before reaching the distal section.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

CATHETER WITH COMPOSITE STIFFENER

FIELD OF THE INVENTION

5 This invention relates generally to catheters, and more particularly, to a catheter with a composite stiffener.

BACKGROUND OF THE INVENTION

10 Catheters are increasingly used to access remote regions of the human body and, in doing so, delivering diagnostic or therapeutic agents to those sites. In particular, catheters which use the circulatory system as the pathway to these treatment sites are especially practical. Catheters are also used to access other regions of the body, e.g., genito-urinary regions, for a variety of therapeutic and diagnostic reasons. One such treatment of diseases of the circulatory system is via angioplasty (PTA). Such a procedure uses catheters having balloons on their distal tips. It is similarly common that those catheters are used to deliver
15 a radiopaque agent to the site in question prior to the PTA procedure to view the problem prior to treatment.

Often the target which one desires to access by catheter is within a soft tissue such as the liver or the brain. These are difficult sites to reach. The catheter must be introduced through a large artery such as those found in the groin or in the neck and then be passed
20 through ever-narrower regions of the vascular system until the catheter reaches the selected site. Often such pathways will wind back upon themselves in a multi-looped path. These catheters are difficult to design and to utilize in that they must be fairly stiff at their proximal end so to allow the pushing and manipulation of the catheter as it progresses through the body, and yet must be sufficiently flexible at the distal end to allow passage of
25 the catheter tip through the loops and increasingly smaller blood vessels mentioned above and yet at the same time not cause significant trauma to the blood vessel or to the surrounding tissue. Further details on the problems and an early, but yet effective, way of designing a catheter for such a traversal may be found in U.S. Patent 4,739,768, to Engelson. These catheters are designed to be used with a guidewire. A guidewire is
30 simply a wire, typically of very sophisticated design, which is the "scout" for the catheter. The catheter fits over and slides along the guidewire as it passes through the vasculature. Said another way, the guidewire is used to select the proper path through the vasculature

with the urging of the attending physician and the catheter slides along behind once the proper path is established.

There are other ways of causing a catheter to proceed through the human vasculature to a selected site, but a guidewire-aided catheter is considered to be both quite
5 quick and somewhat more accurate than the other procedures. One such alternative procedure is the use of a flow-directed catheter.

This invention is an adaptable one and may be used in a variety of catheter formats. The construction technique has the benefit of producing catheter sections having small overall diameters but with exceptional strength, resistance to kinking, and recovery from
10 kinking (even in vivo) should such kinking occur. The catheter may be used in conjunction with a guidewire, but the catheter may also be used as a flow-directed catheter with the attachment of a balloon or in combination with a specifically flexible tip.

The use of a braid or coil in a catheter body is not a novel concept. Typical background patents are discussed below. However, none of these documents have used the
15 concept of this invention to produce a catheter having the structure and physical capabilities of the catheter of this invention.

U.S. Patent No. 5,454,795 discloses a kink-free spiral wound catheter. The catheter includes a stiffener ribbon, typically metallic, spirally wound within the catheter body to create a catheter having controllable stiffness. The stiffener is included in a distal section
20 of the catheter

U.S. Patent No. 5,702,373 shows a catheter having a reinforced braid typically of superelastic alloy ribbon located in a distal section of the catheter. The superelastic alloy ribbon provides high resistance to kinking.

25 SUMMARY OF THE INVENTION

This invention is a catheter having a) a more proximal section preferably made up of an inner tubular liner, a first stiffener comprising a metal alloy, and a second stiffener comprising a non-metal alloy, the first and second stiffeners being coaxially wound exterior
30 to the proximal inner liner; and b) a more distal section comprising a distal inner tubular liner, and the second stiffener coaxially wound exterior to the distal inner liner. The first stiffener desirably terminates before reaching the distal section to provide a more flexible

distal section. Other sections of these or other designs may be placed variously between the noted sections or distal of the distal section described above.

The stiffeners may be wound in a number of different ways. For example, the stiffener may comprise a single strand of ribbon wound in a single direction or multiple strands interwoven in a braid. The first and second stiffeners may be independently wound as a coil or braid or may be interwoven to form a single braid. The first stiffener may include ribbons formed of a superelastic alloy such as nitinol, for example. The metal stiffener provides kink resistance to the proximal section of the catheter. The second stiffener may include a polymer such as liquid crystal polymer, polyurethane, polyimide, polyethylene, polyethylene terephthalate, or Nylon, for example. The second stiffener is desirably made from a material which is capable of being permanently deformed when exposed to steam so that the catheter may be shaped to have various bends for a specific surgical procedure.

The catheter may also have an outer cover exterior to the stiffener. The inner tubular liner and outer cover may be of a polymeric composition. A lubricious coating may be applied to the outer surface of the outer cover or the inner surface of the inner liner.

The catheter assembly may also have such ancillary components as a luer-lock and some manner of providing radiopacity.

The above is a brief description of some deficiencies in the prior art and advantages of the present invention. Other features, advantages, and embodiments of the invention will be apparent to those skilled in the art from the following description, drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side view of a typical three section catheter made using the concepts of this invention;

Fig. 2 is a schematic cross-sectional view of proximal and distal sections of a catheter;

Fig. 3 is a schematic cross-sectional view of alternate proximal and distal sections of a catheter;

Fig. 4 is an enlarged side view of a section of a catheter having a ribbon helically wound on an inner tubular liner;

Fig. 5 is an enlarged side view of the section of Fig. 4 with a second ribbon helically wound over the first ribbon;

Fig. 6 is an enlarged side view of a catheter section having two ribbons interwoven to form a braid between an inner liner and an outer cover, with parts being broken away to show detail; and

Fig. 7 is a schematic cross-sectional view of alternate proximal and distal sections of a catheter.

Corresponding reference characters indicate corresponding parts throughout the several views of the drawings.

DESCRIPTION OF THE INVENTION

This invention is a catheter assembly having a more distal section preferably made up of an inner liner, an outer cover, and a stiffener comprising a non-metal alloy, and a more proximal section comprising an inner liner, an outer cover, and a stiffener comprising a metal alloy and a non-metal alloy. The stiffeners are interposed between the inner liner and outer cover. Other sections of these or other designs may be placed variously between the noted sections or distal of the distal section noted above.

A typical multi-section catheter 100 which may incorporate the concepts of this invention is shown in Fig. 1. Such a catheter is described in more detail in U.S. Patent No. 4,739,768, to Engelson, the entirety of which is incorporated by reference and is particularly suitable for neurological and peripheral vascular applications. It is also suitable for less demanding service such as might be encountered in access and treatment of the heart. One difficulty which has arisen as higher demands for length have been placed on these catheters is that the diameter of the distal section necessarily becomes smaller and smaller. This is so since the longer catheters must reach ever smaller vascular areas. This smaller diameter requires a concomitant thinning of the wall section. The thinner section walls may kink or ripple when actively pushed along the guidewire or when vaso-occlusive devices are pushed through the catheter's lumen. The typical configuration shown in Fig. 1 has a distal section 102 having significant flexibility, an intermediate section 104 which is typically less flexible, and a long proximal section 106 which in turn is least flexible. The distal section 102 is flexible and soft to allow deep penetration of the extraordinary convolutions of the neurological vasculature without trauma. Various known and often

necessary accessories to the catheter assembly, e.g., one or more radiopaque bands 108 at the distal region to allow viewing of the position of the distal region under fluoroscopy and a luer assembly 110 for guidewire 112 and fluids access, are also shown in Fig. 1. The typical dimensions of this catheter are:

Overall length:	60-200 cm
Proximal Section (106):	30-150 cm
Intermediate Section (104):	20-50 cm
Distal Section (102):	2.5-30 cm

Obviously, these dimensions are not particularly critical to this invention and are selected as a function of the malady treated and its site within the body. Typical of the catheters made using this invention are those in the 2 French to 5 French range (1 French = 0.013 inch). The inner diameter of such catheters is then 10 mils. to 42 mils. (1 mil = .001 inch).

Furthermore, a catheter made using this inventive concept need not be of three sections with increasing stiffness as is shown in Fig. 1. The catheter may be of two discrete sections or may be of four or more discrete sections of differing flexibility. Through judicious choice of physical parameters for the catheter sections, the components may also have varying physical parameters (e.g., lubricity, flexibility, wall thickness, inner or outer layer member composition, etc.) within the sections. Typically, although not necessarily, when a three section catheter is desired, the most proximal section 106 is the "more proximal" or "stiff" section described herein. Again, although not necessarily, when a three section catheter is desired, the most distal section 102 is the "more distal" or "flexible" section. The distal section 102 may be the distal end of the catheter.

Figs. 2 and 3 illustrate two catheter portions, generally indicated at 120 and 122, and having a proximal section 124, 126 and a distal section 128, 130, respectively. The distal section 128, 130 may be at the distal end of the catheter, or there may be another section located distally of the distal section. The catheter portions are elongate tubular members having a proximal end, a distal end, and a passageway defining a lumen extending between the proximal and distal ends. Referring to Fig. 2, the catheter portion 120 preferably includes an inner tubular liner 132, an outer cover 134, and a stiffener

coaxially wound and interposed between the inner liner and the outer cover. The stiffener is formed from a first stiffener 140 comprising a metal alloy and a second stiffener 142 comprising a non-metal alloy. The metal stiffener 140 terminates before reaching the distal section 128 so that only the non-metal stiffener 142 is located within the distal section.

5 This allows the distal section 128 to be heated by, for example, exposure to steam, and permanently deformed so that the distal section can be bent into a specific configuration corresponding to vasculature through which the catheter is to be inserted. For example, the distal section 128 of the catheter may be exposed to steam (212 °F) and formed around a mandrel. This allows the shaping of the distal section 128 to be accomplished at the time
10 of surgery while the vasculature is being viewed. The metal stiffeners which are typically present in conventional catheters prevent the reshaping of the distal section of the catheter since the metal itself can not be reshaped by steam heating.

The stiffener may be formed with one or more coils or braids. For example, a metal strand may be helically wound onto the inner liner 132, and a non-metal strand may be
15 helically wound on top of the metal strand. Alternatively, the stiffener may be formed from a metal strand interwoven with a non-metal strand to form a braid. The first and second stiffeners may also be individually formed as a separate braid from two or more strands. It is to be understood that the shape of the strands, number of strands, and arrangement of the strands may be different than shown in Figs. 2 and 3 or described herein without departing
20 from the scope of the invention. For example, the strand may be a wire having a circular or oval cross-sectional shape. Typical coil and braid stiffeners which may be used in the proximal or distal sections are shown in Figs. 4-6.

Fig. 4 shows a magnified section of a catheter body which may be used as a distal section of a catheter. The catheter section includes the inner tubular liner 132 and a
25 stiffener which comprises a helically wound ribbon 150. The ribbon 150 may be simply wound onto the inner liner 132 or the ribbon may be applied with an adhesive. The number of turns or pitch of the ribbon 150 may vary along the length of the section or catheter to control the overall stiffness of the section or catheter.

Fig. 5 shows the catheter section of Fig. 4 with the helically wound stiffener ribbon
30 150 wound in a first direction or "handedness" and a second stiffener ribbon 152 wound in a second direction or "handedness" around both the first stiffener ribbon and the inner tubular liner 132.

A catheter section having a stiffener comprising a braid member 156 interposed between the inner tubular liner 132 and the outer cover 134 is shown in Fig. 6. The braid member 156 may be made up of a suitable number of ribbons, typically four or more. The ribbons are interwoven in an in-and-out fashion as they cross to form a tubular member defining a single lumen. The pitch angle of the braid may be changed at the time the braid is woven or at the time the braid is included in the catheter section.

The coil and braid stiffeners shown in Figs. 4-6 may be used alone or in combination to form a composite stiffener for the catheter of the present invention, as shown in Figs. 2, 3, and 7, and described below.

The catheter portion of Fig. 2 includes first and second stiffeners which are both in the form of a helically wound coil. The second stiffener comprises a non-metal ribbon 142 helically wound in one direction on the inner liner 132 and the first stiffener comprises a metal ribbon 140 helically wound in an opposite direction on the second stiffener. An outer cover 134 is placed over the stiffeners. The metal ribbon 140 is only wound onto the proximal section of the catheter. This construction provides a reduction in stiffness in the distal section while providing a smooth transition between the two sections. In conventional catheters the proximal and distal sections often comprise two different stiffeners having different materials and different configurations. Since the only difference between the proximal section 124 and the distal section 128 is the elimination of the metal stiffener 140, there is no sharp transition which may affect catheter performance. The metal ribbon 140 in the proximal section provides kink-resistance, and increases the stiffness in the proximal section 124, thus improving pushability. The non-metal ribbon 142 in the distal section 128 provides kink-resistance and permits reshaping of the section upon exposure to steam, as previously discussed.

It is to be understood that the arrangement of the coils may be other than the one shown in Fig. 2. For example, the metal ribbon 140 may be first wound on the inner liner 132 and the non-metal ribbon 142 wound on top of the metal ribbon in the proximal section of the catheter. The non-metal ribbon 142 would then assist in holding down the metal ribbon 140. This lessens the tendency of the metal ribbon 140 to unwind and hence create bumps. The metal and non-metal ribbons 140, 142 may also be wound in the same direction, with ribbons being located adjacent one another. One or both of the stiffeners may also be formed with a double ribbon wind (not shown). For a double ribbon wind, a

pair of ribbons is placed side by side and treated as a single ribbon. The braid is denser than the single ribbon wind. The number of ribbons, thickness of the ribbons, and pitch may also vary to further fine tune the stiffness of the catheter in the particular sections.

Fig. 3 schematically shows an alternative embodiment 122 of the catheter portion 120 of Fig. 2. The catheter portion 122 includes the inner liner 132, outer cover 134, a first stiffener, and a second stiffener interwoven to form a braid member. The first stiffener comprises a metal ribbon 160 and the second stiffener comprises a non-metal ribbon 162. The two ribbons 160, 162 are woven together in the proximal section 126 and when the distal section 130 is reached, the metal ribbon is terminated and only the non-metal ribbon is wound in the distal section. Instead of eliminating the metal ribbon 160 from the braid during the braiding process, the braid may be formed as a continuous member with both the metal and non-metal ribbons along the entire length of the braid member. The metal ribbon 160 may then be pulled from the braid in the distal section 130 during assembly of the catheter.

The braid may be interwoven from a single metal ribbon and a single non-metallic ribbon or a plurality of metal and non-metal ribbons. Commercial braiders are typically configured for producing eight or sixteen ribbon braids. The braid may be formed, for example, on a braider with four spools having metal ribbons and four spools having non-metal ribbons to produce a four stranded metal and four stranded non-metal braid. There may also be an uneven number of metal and non-metal ribbons (e.g., six metal ribbons and two non-metal ribbons). The metal and non-metal spools for the braider may be positioned such that the metal ribbons are all wound only in one direction with the non-metal ribbons wound in the opposite direction, or the spools may be positioned so that the metal and non-metal ribbons are intermixed with both type of ribbons being wound in each direction. It should be noted that if all non-metal ribbons are wound in only one direction, the distal section will have a coil stiffener rather than a braided stiffener. Alternatively, the first stiffener may comprise a braid formed from only metal ribbons and the second stiffener may comprise a braid formed from only non-metal ribbons. One braid is then positioned over the other braid in the proximal section, and only the non-metal braid is located in the distal section.

Fig. 7 schematically shows an alternative embodiment of the catheter portion 120 of Fig. 2. The catheter portion includes a proximal section 170 having a stiffener comprising

a non-metal ribbon 174 helically wound on the inner liner 132. A metal ribbon 172 is helically wound on the non-metal ribbon 174. A distal section 176 of the catheter portion includes the non-metal ribbon 174 wound on the inner liner 132. The outer cover 134 is placed over the stiffeners in both the proximal and distal sections 170, 176. The non-metal ribbon 174 is wound in the proximal section 170 with the rectangular cross-section of the ribbon extending generally parallel to a longitudinal axis A of the catheter. The ribbon 174 is rotated in the distal section 176 so that the rectangular cross-section extends generally perpendicular to the longitudinal axis A. The ribbon 174 may also be wound in the proximal section 170 in the same orientation as in the distal section 176, for example. The non-metal ribbon 174 may also be positioned over the metal ribbon 172 in the proximal section, as previously discussed.

The metal stiffener is preferably formed from a metal alloy, such as stainless steel, tantalum or its alloys, tungsten, platinum, gold, copper, palladium, rhodium, or a superelastic alloy. Preferred superelastic alloys include the class of nickel/titanium materials known as nitinol, disclosed in U.S. Patent Nos. 3,174,851, 3,351,463, and 3,753,700. Commercial alloys containing up to about 5% of one or more other members of the iron group, e.g., Fe, Cr, Co, are considered to be encompassed within the class of superelastic nickel/titanium alloys suitable for use. When using a superelastic alloy, an additional heat treat step may be desirable to preserve the shape of the stiffener. The stiffener is placed on a mandrel and then heated to a temperature of 650°-900°F for a few minutes. After heat treatment, the stiffener retains its shape and the alloy retains its superelastic properties.

Desirable non-metal materials for the second stiffener include Pebax, Peek, polyimide, liquid crystal polymers (LCP) such as Vectran, polyethylene, polyethylene terephthalate and Nylon. Other suitable non-metallic materials include polymeric materials such as polyester, polypropylene, carbon fiber, polyaramids (e.g., KEVLAR), and lower performance polymers such as Dacron.

The ribbons are preferably between 0.3 mil. and 3.5 mil., and more preferably between 0.75 mil. and 1.5 mil. in thickness, and 2.5 mil. and 12.0 mil. in width. For superelastic alloys, particularly nitinol, the thickness and width may be somewhat finer, e.g., down to 0.5 mil. and 1.0 mil., respectively. The width of the ribbons may vary to provide specific stiffness requirements at different locations along the length of the

catheter. The stiffeners may also be formed from a wire having a circular cross-sectional area.

Preferred polymeric materials for the inner liner 132 include fluoropolymers including PTFE, FEP, vinylidene fluoride, polyethylene, polyvinyl chloride (PVC), ethyl vinyl acetate (EVA), polyethylene terephthalate (PET), polyimide, polyamide, polypropylene, polyfluorocarbons, polyurethane (Carbothane), polyether block amide (Pebax), styrene-ethylene/butylene-styrene (SEBS), styrene-butadiene-styrene (SBS), polysulfone, and their mixtures, alloys, copolymers and block copolymers. Another useful class of polymers are thermoplastic elastomers, including those containing polyesters as components. Typical of this class is HYTREL. The inner liner 132 may be coated onto the inner surface of the stiffener. Polyesters and polyimides, in particular, are useful as adhesives in this service. The wall thickness of the inner liner 132 may be between 0.3 mil. and 3.0 mil., for example.

The outer cover 134 may be made of polyethylene or of EVA or their mixtures, for example. Preferred polymeric materials for the outer cover 134 include polyimide, polyamide, polyethylene, polyurethane, polyvinyl chloride, polypropylene, fluoropolymer including PTFE, FEP, vinylidene fluoride, and their mixtures, alloys, copolymers, and block copolymers. The polymer is typically extruded into a tubing of appropriate size and thickness and then crosslinked to raise the melt temperature of the resulting tubing. The tubing is then inflated and perhaps stretched to give the included polymer a specific molecular orientation. The tubing, so treated, may then be slipped over the combination of inner liner 132 and stiffener and heat shrunk into place. Heat shrunk tubing may be further heated to shrink the tubing in such a way that it fills the interstices between the windings of the ribbon. This allows the outer cover 134 to directly contact the inner tubular liner 132. Even more desirably, the outer cover 134 should be further heated to allow mixing of the outer cover with the inner liner 132 at their interface so as to form a strong integral catheter section. If a section with even more flexibility is required, the outer cover 134 may also be of a member selected from a more flexible material such as polyurethane (Carbothane), low density polyethylene (LDPE), polyvinyl chloride, polyurethane, polyether block amide (Pebax), styrene-ethylene/butylene-styrene (SEBS), styrene-butadiene-styrene (SBS), and other polymers of suitable softness or modulus of elasticity.

The wall thickness of the outer cover 134 may be between 0.5 mil. and 10 mil., for example.

The outer cover 134 may also be applied by dipping the inner liner 132 and stiffener ribbon into a molten polymer bath or into a polymer dissolved in a solid or into a suspension or latex comprising the outer cover polymer. The outer cover 134 may also be placed on the catheter by spraying or otherwise applying the material.

The inner tubular liner 132 and outer cover 134 may each be formed as two separate members for the proximal and distal sections (i.e., proximal and distal inner tubular liners, and proximal and distal outer covers). The material of proximal inner tubular liner may be selected to have a higher stiffness than the material of the distal inner liner. The inner liner may also be omitted particularly in the more proximal section, since the majority of materials which are suitable for the more proximal section are very hard and suitably slippery for passage of guidewires 112 and the like.

It is to be understood that the materials and thickness of the inner liner 132 and outer cover 134 may be different than described herein without departing from the scope of the invention. Furthermore, each of the polymers noted herein may be used in conjunction with radiopaque filler materials such as barium sulfate, bismuth trioxide, bismuth carbonate, powdered tungsten, powdered tantalum, or the like so that the location of various portions of the catheter sections may be radiographically visualized within the human body.

The exterior surface of the outer cover 134 and the inner surface of the inner liner 132 may be coated with a lubricious layer which is chemically bonded or is physically coated on the surface. Polymers which inherently adhere to each other may be used for the inner liner 132 and outer cover 134 (e.g., certain polyethylenes and polyimides, or thermoplastics, which are miscible with one another upon appropriate heating, such as Pebax and polyurethanes). The exterior and interior surfaces of the catheter or catheter section may be coated with a lubricious layer such as a hydrophilic polymer layer, which is either chemically bonded to the layer or is physically coated on the surface.

The number and type of sections of the catheter may vary. The catheter sections may have multiple polymeric layers exterior of the stiffener as well as multiple polymeric liner members interior to the stiffener. The catheter sections may also include multiple layers of stiffeners between or amongst the various polymer layers.

In view of the above, it will be seen that the several objects of the invention are achieved and other advantageous results attained.

As various changes could be made in the above constructions and methods without departing from the scope of the invention, it is intended that all matter contained in the
5 above description and shown in the accompanying drawings shall be interpreted as illustrative and not in a limiting sense.

CLAIMSWHAT IS CLAIMED IS:

5 1. A catheter comprising an elongate tubular member having a proximal end, a distal end, and a passageway defining a lumen extending between the proximal and distal ends, said elongate tubular member comprising:

10 a relatively stiff proximal section comprising a proximal inner tubular liner, a first stiffener comprising a metal alloy, and a second stiffener comprising a non-metal alloy, said first and second stiffeners being coaxially wound exterior to the proximal inner tubular liner; and

15 a relatively flexible distal section comprising a distal inner tubular liner and said second stiffener coaxially wound exterior to the distal inner liner, said first stiffener terminating before reaching said distal section.

20 2. The catheter of claim 1 wherein said second stiffener is interposed between the inner tubular liner and said first stiffener.

25 3. The catheter of claim 1 wherein said first stiffener is interposed between the inner tubular liner and said second stiffener.

 4. The catheter of claim 1 wherein said first stiffener is a helically wound ribbon.

 5. The catheter of claim 1 wherein said second stiffener is a helically wound ribbon.

30 6. The catheter of claim 1 wherein said first stiffener is helically wound in one direction and said second stiffener is helically wound in an opposite direction.

7. The catheter of claim 1 wherein said first and second stiffeners are interwoven to form a braid member.

5 8. The catheter of claim 7 wherein said first and second stiffeners each comprise a ribbon.

9. The catheter of claim 8 wherein said ribbons have a thickness of between 0.3 mil. and 3.5 mil. and a width between 2.5 mil. and 12.0 mil.

10 10. The catheter of claim 7 wherein said first and second stiffeners each comprise four strands.

11. The catheter of claim 7 wherein said braid member has a braid pitch and said braid pitch is not constant along the length of the braid member.
15

12. The catheter of claim 1 wherein said first stiffener comprises a first braid member and said second stiffener comprises a second braid member.

13. The catheter of claim 1 wherein said second stiffener comprises a material
20 capable of undergoing permanent deformation upon exposure to steam.

14. The catheter of claim 1 wherein said second stiffener comprises a polymer.

15. The catheter of claim 14 wherein said polymer comprises a liquid crystal
25 polymer.

16. The catheter of claim 14 wherein said polymer comprises a material selected from the group consisting of polyimide, polyethylene, polyethylene terephthalate, and Nylon.
30

17. The catheter of claim 1 wherein said first stiffener comprises a superelastic alloy.

18. The catheter of claim 17 wherein said superelastic alloy comprises nickel and titanium.

5 19. The catheter of claim 1 wherein said first stiffener comprises stainless steel.

20. The catheter of claim 1 wherein said first stiffener comprises a material selected from the group consisting of gold, platinum, and copper.

10 21. The catheter of claim 1 wherein said first stiffener comprises a platinum-tungsten alloy.

22. The catheter of claim 1 wherein the proximal and distal inner tubular liners each comprise a polymer.

15

23. The catheter of claim 22 wherein the polymer is selected from the group consisting of polyimide, polyamide, polyester, polyethylene, polypropylene, polyvinyl chloride, polyfluorocarbons, polyurethane, polysulfone, ethyl vinyl acetate, polyether block amide, styrene-ethylene/butylene-styrene, styrene-butadiene-styrene, polyethylene terephthalate, and their mixtures, alloys, blends, copolymers, and block copolymers.

20

24. The catheter of claim 1 wherein said proximal section comprises a proximal outer cover exterior to said first and second stiffeners, and said distal section comprises a distal outer cover exterior to said second stiffener.

25

25. The catheter of claim 24 wherein the proximal and distal outer covers comprise a material selected from the group consisting of polyimide, polyamide, polyether block amide, styrene-ethylene/butylene-styrene, styrene-butadiene-styrene, polyethylene, polypropylene, polyvinyl chloride, fluoropolymer, vinylidene fluoride, polyurethane, and their mixtures, alloys, copolymers, and block copolymers.

30

26. The catheter of claim 24 wherein the proximal and distal outer covers are integrally formed and comprise a polymer which can be heat-shrunk onto said first and second stiffeners.

5 27. The catheter of claim 24 wherein at least one of the inner tubular liner and the outer covers are radiopaque.

28. The catheter of claim 1 further comprising a removable, slidable guidewire placed interior to and in slidable relationship to said distal and proximal sections.

10

29. The catheter of claim 1 wherein said second stiffener comprises a helically wound ribbon having a rectangular cross-section extending generally parallel to a longitudinal axis of the catheter in said proximal section, and generally perpendicular to the longitudinal axis of the catheter in said distal section.

15

30. A catheter comprising an elongate tubular member having a proximal end, a distal end, and a passageway defining an inner lumen between the proximal and distal ends, said elongate tubular member comprising:

20

a relatively stiff proximal section comprising an inner tubular liner, a proximal braid member comprising at least one metal alloy strand and at least one non-metal alloy strand, and a proximal outer cover, said braid being coaxially wound exterior to the inner tubular liner; and

25

a relatively flexible distal section comprising the inner tubular liner and a distal braid member comprising said at least one non-metal alloy strand, and a distal outer cover, said at least one metal alloy strand terminating before reaching said distal section.

30

31. The catheter of claim 30 wherein said metal alloy strand and said non-metal alloy strand each comprise a ribbon.

32. The catheter of claim 31 wherein said ribbons have a thickness of between 0.5 mil. and 3.5 mil. and a width between 2.5 mil. and 12.0 mil.

33. The catheter of claim 30 wherein said at least one metal alloy strand comprises four metal alloy strands and said at least one non-metal alloy strand comprises four non-metal alloy strands.

34. The catheter of claim 30 wherein said non-metal alloy strand comprises a polymer.

35. The catheter of claim 34 wherein said polymer comprises a liquid crystal polymer.

36. The catheter of claim 34 wherein said polymer comprises a material selected from the group consisting of polyimide, polyethylene, polyethylene terephthalate, and Nylon.

37. The catheter of claim 30 wherein said metal alloy strand comprises a superelastic alloy.

38. The catheter of claim 37 wherein said superelastic alloy comprises nickel and titanium.

39. The catheter of claim 30 wherein said metal alloy strand comprises stainless steel.

40. The catheter of claim 30 wherein said metal alloy strand comprises a platinum-tungsten alloy.

41. The catheter of claim 30 wherein the inner tubular liner and the proximal and distal outer covers comprise a polymer.

42. The catheter of claim 30 further comprising a removable, slidable guidewire placed interior to and in slidable relationship to said distal and proximal sections.

5 43. The catheter of claim 30 wherein said distal section is disposed at the distal end of the catheter.

1/4

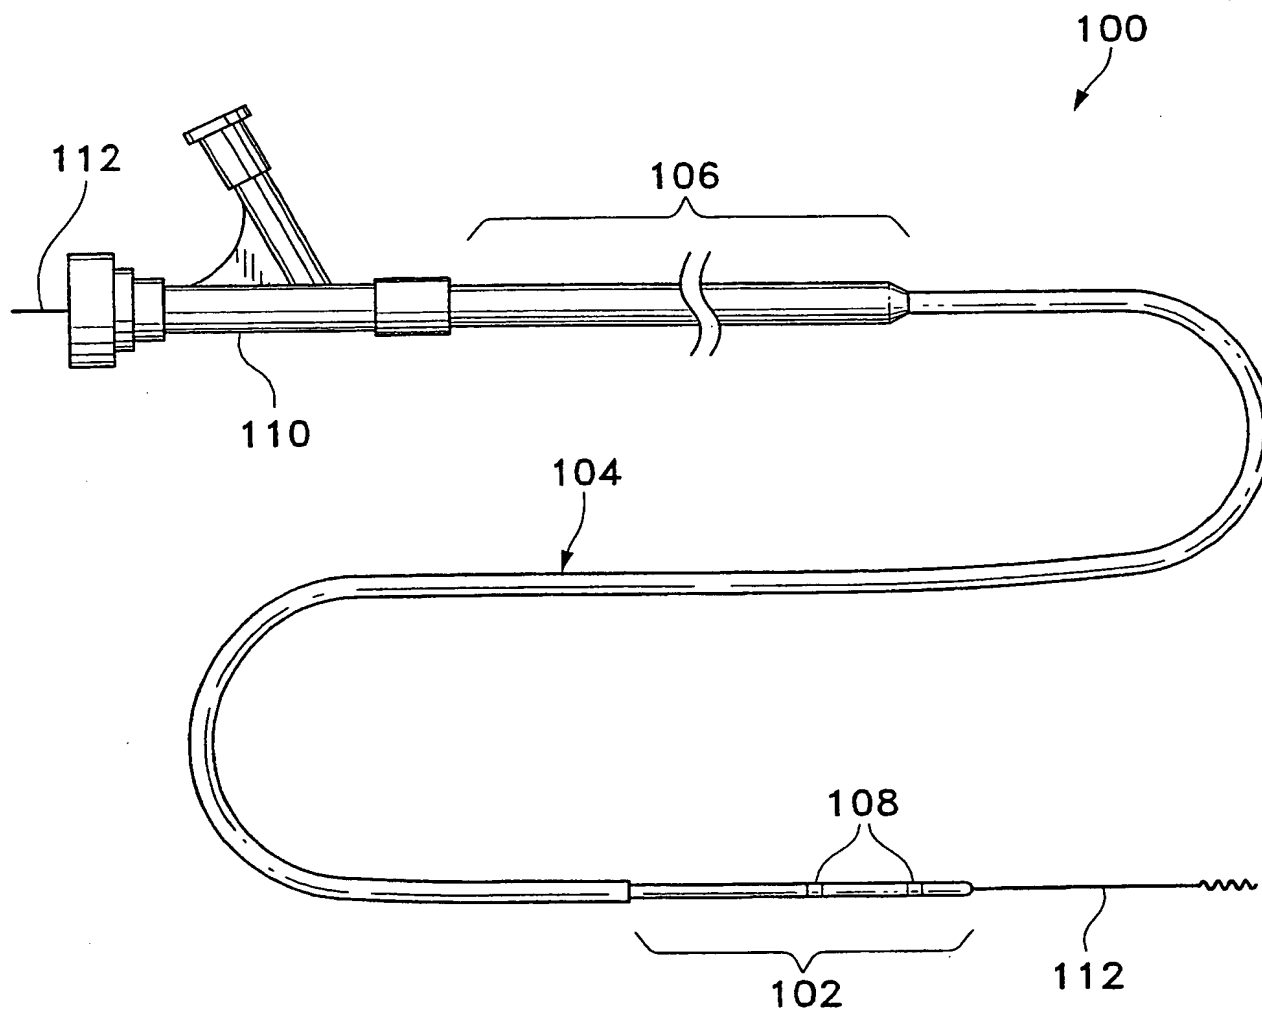


Fig. 1

2/4

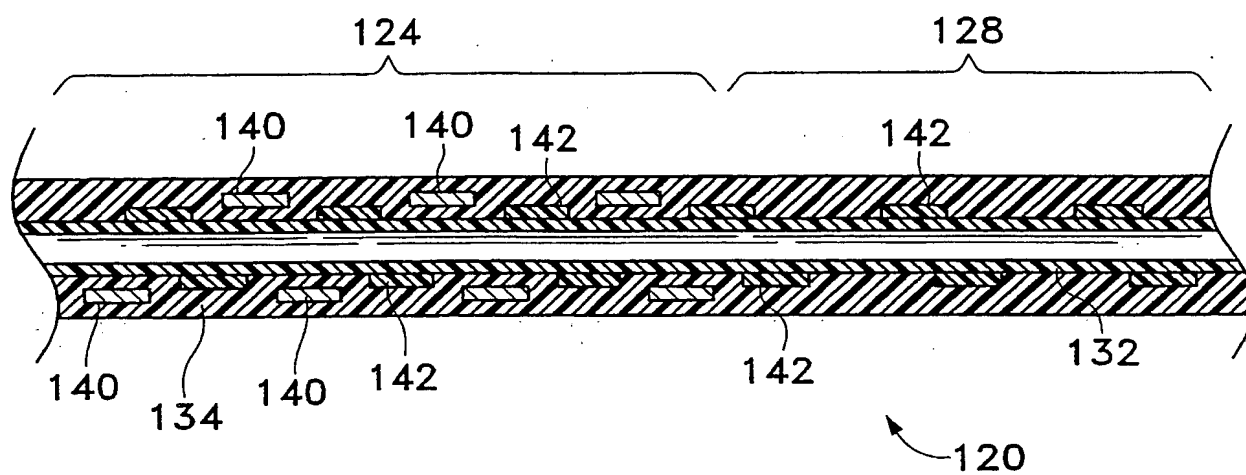


Fig. 2

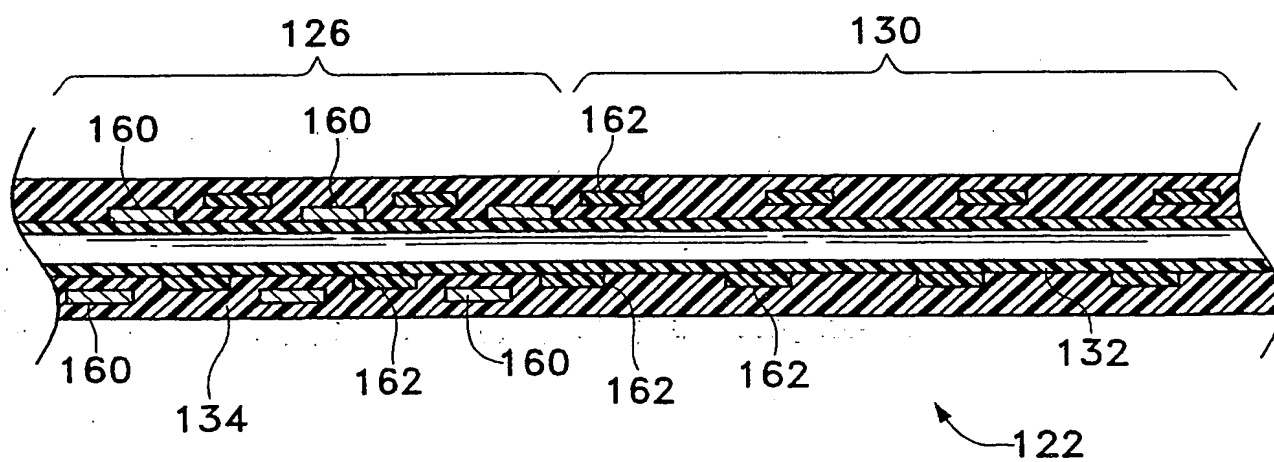


Fig. 3

3/4

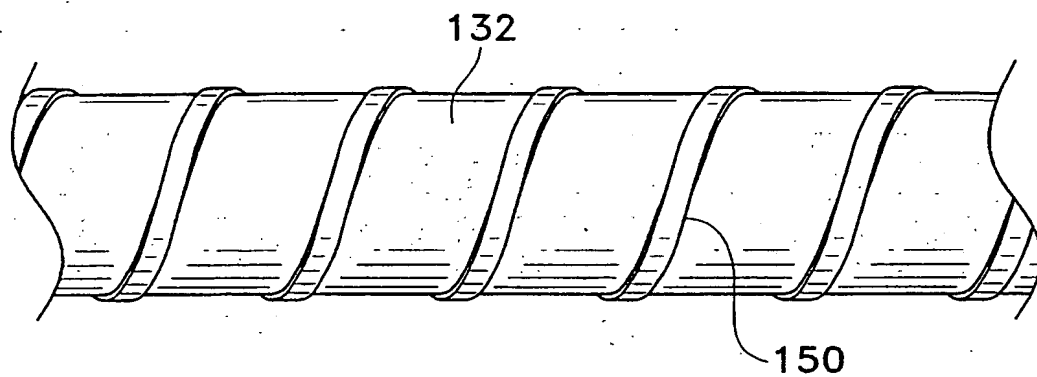


Fig. 4

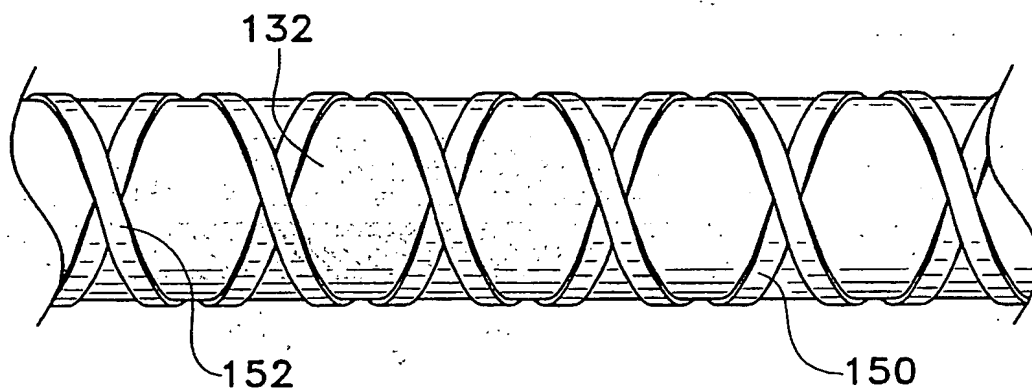


Fig. 5

4/4

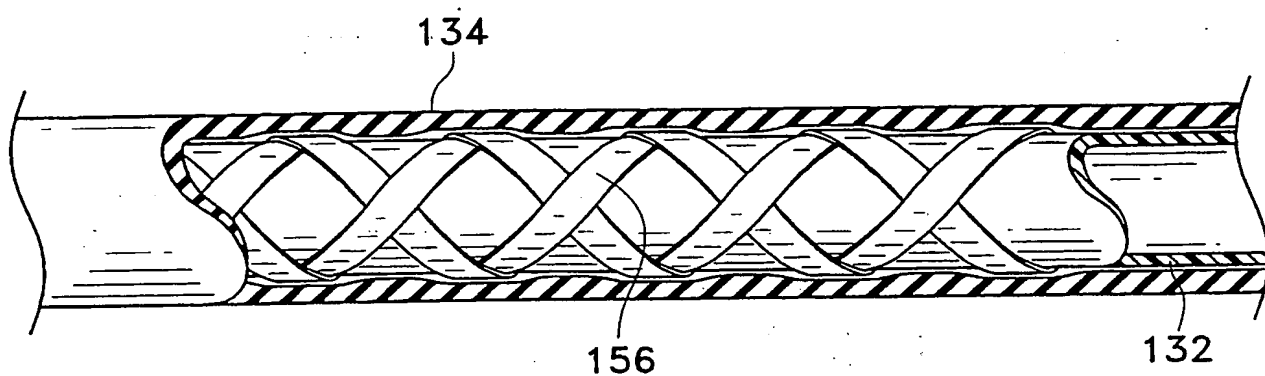


Fig. 6

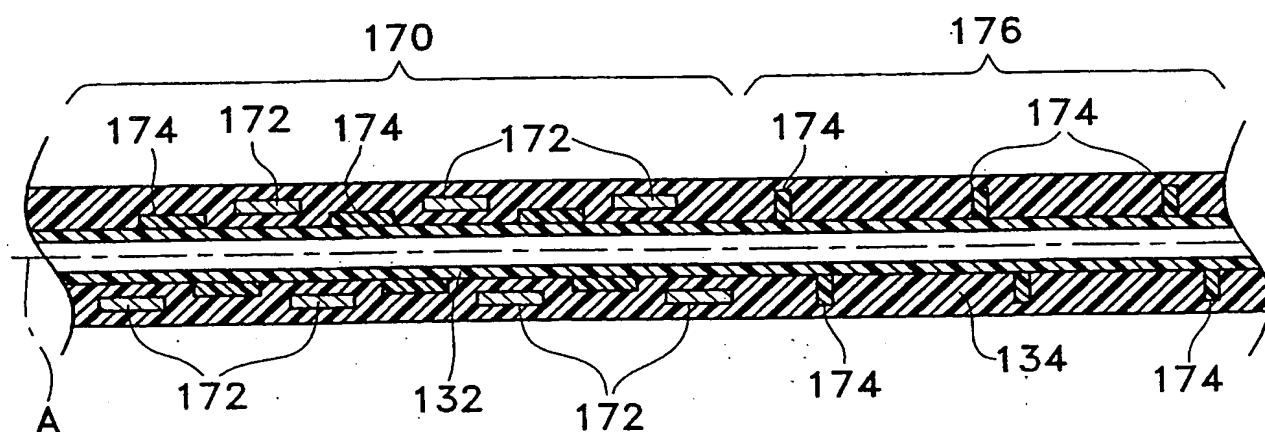


Fig. 7

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/13328

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61M25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 695 483 A (SAMSON) 9 December 1997 (1997-12-09) abstract	1-12, 14, 16-43
Y	column 3, line 54 - line 68 column 5, line 28 - column 6, line 62 column 7, line 19 - line 24; claims 1,3-6,9,10; figures 2,4,7,10,11	13,15
Y	WO 96 38194 A (SCIMED LIFE SYSTEMS, INC.) 5 December 1996 (1996-12-05) abstract column 14, line 12 - line 26; claims 1-3; figures 2A,B,10A-C	13,15

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 September 1999

Date of mailing of the international search report

24/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Michels, N

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/US 99/13328

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 715 863 A (TARGET THERAPEUTICS INC) 12 June 1996 (1996-06-12) abstract column 9, line 11 - line 30 column 11, line 9 - line 36 column 12, line 28 -column 13, line 27; figures 2,5-9	1-43
A	EP 0 815 894 A (TARGET THERAPEUTICS, INC.) 7 January 1998 (1998-01-07) abstract; figure 1	1,13

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter national Application No

PCT/US 99/13328

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5695483	A	09-12-1997	US 5454795 A	03-10-1995
			US 5876386 A	02-03-1999
			AT 169830 T	15-09-1998
			AU 684980 B	08-01-1998
			AU 2872595 A	19-01-1996
			CA 2170913 A	04-01-1996
			DE 69504175 D	24-09-1998
			DE 69504175 T	18-02-1999
			EP 0729368 A	04-09-1996
			EP 0847772 A	17-06-1998
			JP 9501094 T	04-02-1997
			JP 2672714 B	05-11-1997
			WO 9600101 A	04-01-1996
WO 9638194	A	05-12-1996	CA 2222579 A	05-12-1996
			EP 0830169 A	25-03-1998
			US 5730733 A	24-03-1998
EP 0715863	A	12-06-1996	US 5658264 A	19-08-1997
			AU 3780495 A	16-05-1996
			CA 2162554 A	11-05-1996
			JP 8206215 A	13-08-1996
			US 5795341 A	18-08-1998
			US 5853400 A	29-12-1998
EP 0815894	A	07-01-1998	US 5833631 A	10-11-1998
			AU 696259 B	03-09-1998
			AU 2835797 A	22-01-1998
			CA 2209178 A	28-12-1997
			JP 10066728 A	10-03-1998
			NO 973012 A	29-12-1997

THIS PAGE BLANK (USPTO)